


CATARIFRANGENTI
REFLECTORS


RELAZIONE DISTANZA CATARIFRANGENTE/FOTOCPELLULA
RELATIONSHIP BETWEEN REFLECTOR AND DISTANCE




LIMITI DI TEMPERATURA MAX.: -10 ÷ +60°C / MATERIALE: PMMA
TEMPERATURE LIMITS: -10 ÷ +60°C / PLASTIC MATERIAL: PMMA/ABS

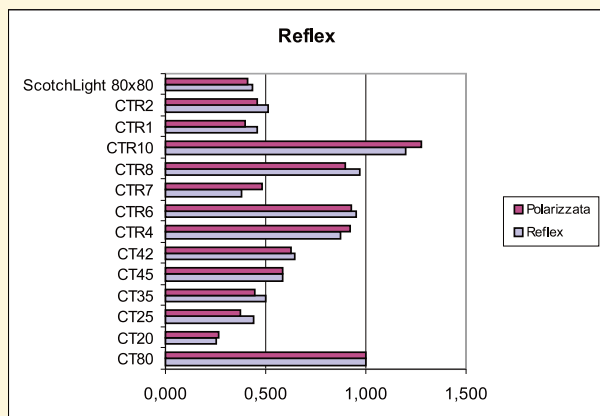


CT20-RFL000001
Spessore 5 mm
Thickness 5 mm




CT25-RFL000002
Spessore 6 mm
Thickness 6 mm



CT35-RFL000003
Spessore 6 mm
Thickness 6 mm




CT80-RFL000008
Spessore 8 mm
Thickness 8 mm

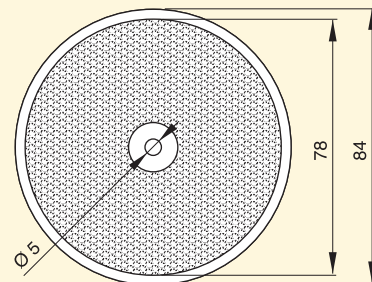


DIMENSIONI (mm)
DIMENSIONS (mm)


CT42-RFL000004
Spessore 6,8 mm
Thickness 6,8 mm




CT45-RFL000005
Spessore 8 mm
Thickness 8 mm




CTR4-RFL000014
Spessore 6 mm
Thickness 6 mm

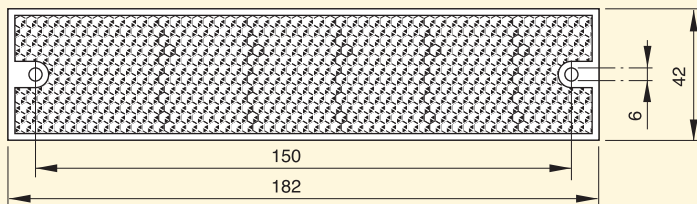


CTR6-RFL000015
Spessore 8,5 mm
Thickness 8,5 mm




CTR7-RFL000016
Spessore 8 mm
Thickness 8 mm

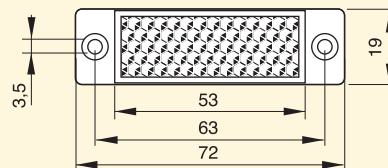


RFL000011
Foglio formato A4
210 x 305 mm
Sizes Din A4
210 x 305 mm




CARTA RIFRANGENTE
AUTOADESIVA
SCOTCHLIGHT

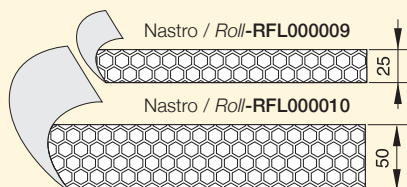

CTR8-RFL000017
Spessore 8 mm
Thickness 8 mm



CTR10-RFL000018
Spessore 9,5 mm
Thickness 9,5 mm

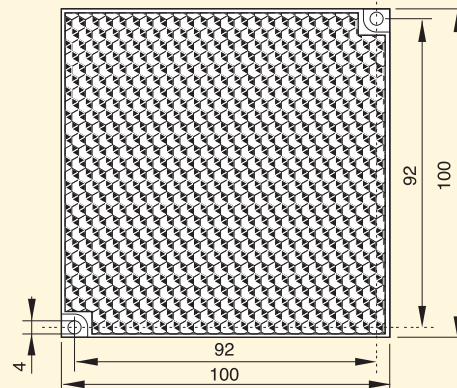



AECO s.r.l.

via G. Leopardi, 5 - 20065 Inzago (Milano) ITALY
Tel. ++39 02 954381 - Fax ++39 02 9548528

email: aeco@aecosensors.com

www.aecosensors.com