




MORE THAN SENSORS

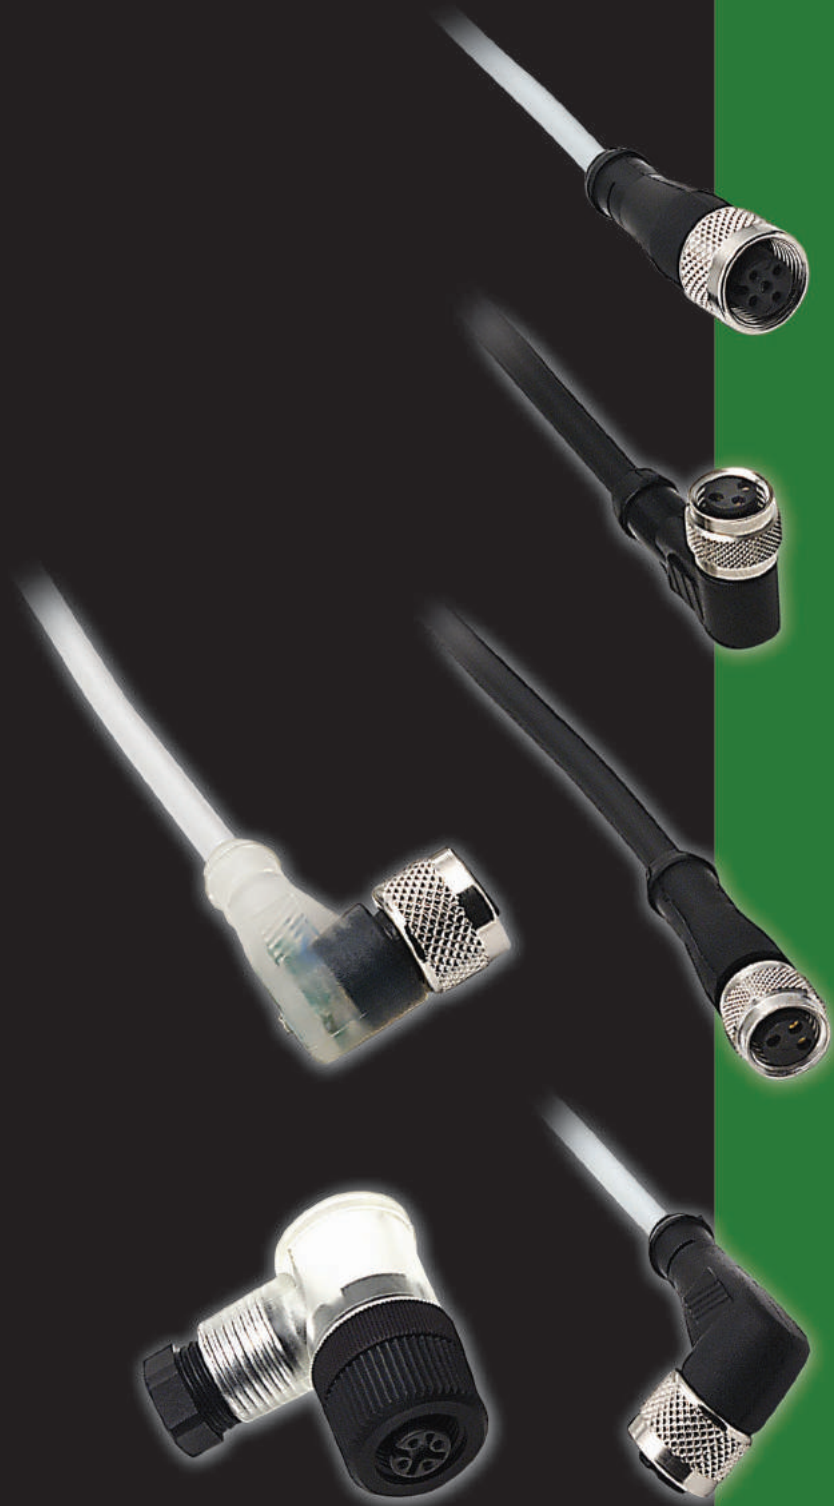

CONNETTORI - CONNECTORS

CONNETTORI SENSORI INDUTTIVI-CAPACITIVI-FOTOELETTRICI

- Nei sensori con attacco H1 e H il connettore femmina non è incluso nella fornitura e deve essere ordinato a parte.
- Nei sensori con attacco K il connettore femmina Mod. 11 o Mod 12 è già incluso nella fornitura.
- I connettori per attacco H1 (M8) ed H (M12) hanno un grado di protezione IP67. Nei modelli per attacco H (M12) a cablare serrare bene il pressacavo di uscita cavo sul cavo stesso.
- I connettori per attacco K Mod. 11 o Mod. 12 hanno un grado di protezione IP65. Serrare bene il pressacavo di uscita cavo sul cavo stesso.

CONNECTORS INDUCTIVE-CAPACITIVE-PHOTOELECTRIC SENSORS



- H and H1 plug sensors are not supplied with female connector; this is to be ordered separately.
- K connector sensors are supplied with Mod. 11 or Mod. 12 connector plug.
- M8 connectors for H1 plug and M12 connectors for H plug have an IP rating of 67 (IP67). Pls. make sure you tighten cable gland on M12 H plug sensors.
- Mod. 11 or 12 for K plug have an IP rating of 65 (IP65), Pls. make sure you tighten cable gland.

CONNETTORI M8 PER ATTACCO H1 COMPATIBILE

CONNECTORS M8 FOR H1 PLUG

DIMENSIONI / DIMENSIONS (mm)	N° POLI / N° POLES	CAVO / CABLE	VERSIONE / VERSION	MODELLO-CODICE / MODEL-CODE
		PUR 3 x 0.25 5 m	3 FILI / 3 WIRES	Mod. 21M8LC5 COC000032
	3 POLI / 3 POLES VISTA FEMMINA VIEW OF FEMALE	PUR 4 x 0.25 5 m	4 FILI / 4 WIRES	Mod. 21/4M8LC5 COC000051
		PUR 3 x 0.25 5 m	3 FILI / 3 WIRES	Mod. 19M8LC5 COC000029
	VISTA FEMMINA VIEW OF FEMALE	PUR 4 x 0.25 5 m	4 FILI / 4 WIRES	Mod. 19/4M8LC5 COC000050
		PUR 3 x 0.25 5 m	3 FILI CON LED PNP 3 WIRES WITH LED PNP	Mod. 22M8PNP/LEDLC5 COC000030

CONNETTORI M12 PER ATTACCO H COMPATIBILE

CONNECTORS M12 FOR H PLUG

DIMENSIONI / DIMENSIONS (mm)	N° POLI / N° POLES	CAVO / CABLE	VERSIONE / VERSION	MODELLO-CODICE / MODEL-CODE
	VISTA FEMMINA VIEW OF FEMALE	PVC 4 x 0.25 2 m	4 FILI / 4 WIRES	Mod. 14/4M12SLLC2 - COC000011
		4 FILI CON LED PNP / 4 WIRES WITH LED PNP	Mod. 14/4M12 PNP LED LC2 - COC000012	
		PVC 4 x 0.25 5 m	4 FILI / 4 WIRES	Mod. 14/4M12SLLC5 - COC000019
		4 FILI CON LED PNP / 4 WIRES WITH LED PNP	Mod. 14/4M12 PNP LED LC5 - COC000021	
		PVC 4 x 0.35 - 5 m	4 FILI CON LED NPN / 4 WIRES WITH LED NPN	Mod. 14/4M12 NPN LED LC5 - COC000022
			-	A MORSETTI TERMINAL BLOCK
		PVC 4 x 0.25 2 m	4 FILI / 4 WIRES	Mod. 15/4M12SLLC2 COC000027
		PVC 4 x 0.25 5 m		Mod. 15/4M12SLLC5 COC000026
		-	A MORSETTI TERMINAL BLOCK	Mod. 10M12 A CABLARE / TO BE WIRED COC000006
		-	A MORSETTI TERMINAL BLOCK	Mod. 9M12 A CABLARE / TO BE WIRED COC000001
		A MORSETTI / CUSTODIA TRASPARENTE TERMINAL BLOCK / TRANSPARENT HOUSING	Mod. 9TM12 A CABLARE / TO BE WIRED COC000003	

CONNETTORI PER ATTACCO K COMPATIBILE

CONNECTORS FOR K PLUG

DIMENSIONI / DIMENSIONS (mm)	N° POLI / N° POLES	CAVO / CABLE	VERSIONE / VERSION	MODELLO-CODICE / MODEL-CODE
	VISTA FEMMINA VIEW OF FEMALE	-	A MORSETTI TERMINAL BLOCK	Mod. 11 A CABLARE 4 POLI / TO BE WIRED 4 POLES COC000007
		-	A MORSETTI TERMINAL BLOCK	Mod. 12 A CABLARE 4 POLI / TO BE WIRED 4 POLES COC000010





AECO

20065 Inzago (MILANO) ITALY - Via G. Leopardi, 5
Tel. ++39 02 954381 - Fax ++39 02 9548528

www.aecosensors.com / email: aeco@aecosensors.com